
MODEL	TORQUE		INERTIA		BENDING MOMENT		HEAT DISSIPATION	WEIGHT	
513-XXX-1	.001007 Nm	.11 - 1 in. oz	3.5E-5 kgm^2	2.5E-7 in oz s^2	.22 Nm	2 in. lbs	2.2 Watts	.071 kg	.16 lbs

REV. ECN. DESCRIPTION DATE

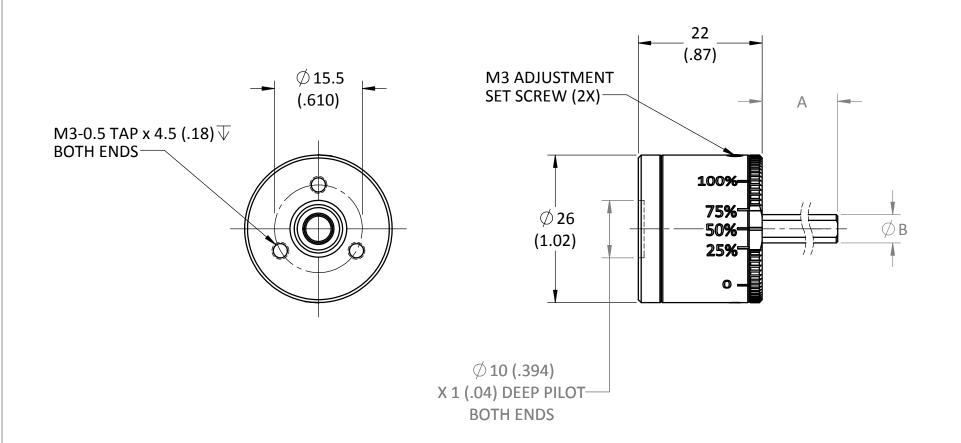


MODEL	A DIME	ENSION	B DIMENSION		
513-001-1	13 mm	.51 in	5 mm ⁰³	.197 in	
513-007-1	25 mm	.98 in	5 mm ⁰³	.197 in	
513-012-1	13 mm	.51 in	4.75 mm ⁰³	.187 in ⁰⁰¹	

OTHER SIZES AVAILABLE; SPECIFY BOTH "A" AND "B"

1.00 0.007 Intermittent 0.005 0.75 Duty € 0.50 0.004 Continuous Duty 0.25 0.002 0.00 0.000 1000 2000 3000 4000 5000 6000 7000 Slip RPM 513-XXX-1 Torque versus Adjustment Angle

513-XXX-1 Heat Curve

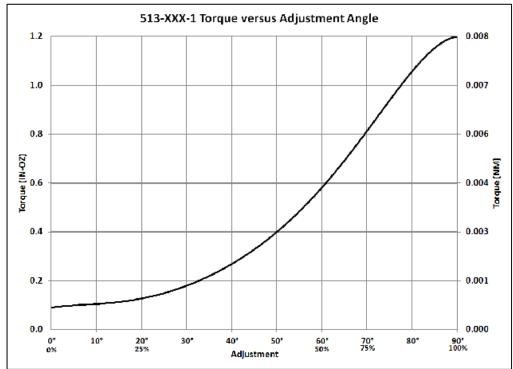

USED ON 513	3:2	SEE PRT	DWG	MAGNETIC		
UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: .XX ± .01 .XXX ± .005 ANGULAR: ± 1°		SEE PRT DWG		TECHNICI OCIEC ITO		
GEN. CONCENTRI MACH. FILLETS: .0 MACH. EDGES: .01	GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R		4/2/13	DESCRIPTION 513-XXX-1 Cut Sheet		
IN MICROINCHES GEOMETRIC: TO N REMOVE ALL BUR		SIZE: B		DWG. NO. 513-XXX-1	REV.	